

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup>: C08F 297/00, 297/06, 297/08, 10/00, C07F 17/00

(11) International Publication Number:

WO 99/67309

, A1

(43) International Publication Date: 29 December 1999 (29.12.99)

(21) International Application Number:

PCT/EP99/04248

(22) International Filing Date:

18 June 1999 (18.06.99)

(30) Priority Data:

98111334.3

19 June 1998 (19.06.98)

EP

(71) Applicant (for all designated States except US): FINA RE-SEARCH S.A. [BE/BE]; Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): RAZAVI, Abbas [IR/BE]; Domaine de la Brisée, 35, B-7000 Mons (BE). HORT-MANN, Kai [DE/BE]; Weidestraat, 42 B, B-1700 Dilbeek (BE).
- (74) Common Representative: FINA RESEARCH S.A.; Patent Dept., Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

#### Published

With international search report.

(54) Title: POLYOLEFIN PRODUCTION

#### (57) Abstract

A C<sub>1</sub> symmetric metallocene compound of the general formula: R'' (CpR<sub>n</sub>)(Cp'R'<sub>m</sub>) MQ<sub>p</sub> for use as a catalyst component in the production of short sequence syndiotactic/isotactic block polyolefins, wherein Cp is a substituted cyclopentadienyl; each R is independently aryl or hydrocarbyl having 1 to 20 carbon atoms, at least position 3 of Cp is substituted with aryl, at least one other position of Cp is substituted with a non-bulky substitutent, and n is an integer in the range from 2 to 4; Cp' is substituted or unsubstituted fluorenyl; each R' is independently hydrocarbyl having 1 to 20 carbon atoms and m is O or an integer in the range from 1 to 8; R'' is a structural bridge to impart stereorigidity between Cp and Cp'; M is a metal from Group IIIB, IVB, VB or VIB; Q is a hydrocarbyl radical having 1 to 20 carbon atoms or a halogen; and p is the valence of M minus 2.

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	7h	SI	C1'-	
AM	Amenia		•		Lesotho	_	Slovenia	
		FI	Finland	LT	Lithuania	SK	Slovakia	
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal	
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland	
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad	
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo	
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan	
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan	
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey	
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago	
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine	
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda	
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America	
CA	Салада	IT	Italy	MX	Mexico	UZ	Uzbekistan	
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam	
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia	
CH	Switzerland	KG -	Kyrgyzstan	NO.	Norway	ZW	Zimbabwe	1
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand			
CM	Cameroon		Republic of Korea	PL	Poland			
CN	China	KR	Republic of Korea	PT	Portugal			
CU	Cuba	KZ	Kazakstan	RO	Romania			
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation			
DE	Germany	LI	Liechtenstein	SD	Sudan			
DK	Denmark	LK	Sri Lanka	SE	Sweden			
EE	Estonia	LR	Liberia	SG	Singapore			

## - 1 -

#### POLYOLEFIN PRODUCTION

#### FIELD OF THE INVENTION

The present invention relates to a metallocene compound for use as a catalyst component in the production of short sequence syndiotactic/isotactic block polyolefins, catalyst systems containing the metallocene compound and their use in processes for the production of such polyolefins.


#### BACKGROUND TO THE INVENTION

Olefins having 3 or more carbon atoms can be polymerised to produce a polymer with an isotactic stereochemical configuration. For example, in the polymerisation of propylene to form polypropylene, the isotactic structure is typically described as having methyl groups attached to the tertiary carbon atoms of successive monomeric units on the same side of a hypothetical plane through the main chain of the polymer. This can be described using the Fischer projection formula as follows:



Another way of describing the structure is through the use of NMR spectroscopy. Bovey's NMR nomenclature for an isotactic pentad is ... mmmm with each "m" representing a "meso" diad or successive methyl groups on the same side in the plane.

In contrast to the isotactic structure, syndiotactic polymers are those in which the methyl groups attached to the tertiary carbon atoms of successive monomeric units in the chain lie on alternate sides of the plane of the polymer. Using the Fischer projection formula, the structure of a syndiotactic polymer is described as follows:



In NMR nomenclature, a syndiotactic pentad is described as

#### CONFIRMATION COPY

- 2 -

...rrr... in which "r" represents a "racemic" diad with successive methyl groups on alternate sides of the plane.


In contrast to isotactic and syndiotactic polymers, an atactic polymer exhibits no regular order of repeating unit. Unlike syndiotactic or isotactic polymers, an atactic polymer is not crystalline and forms essentially a waxy product.

The production of syndiotactic/isotactic block polypropylene is known from EP-A-0747406. In these known block polypropylenes there is a long isotactic block and few short syndiotactic blocks. A generically defined metallocene compound is disclosed as a catalyst component in the production of these block polypropylenes. The metallocene compound has a cyclopentadienyl ring which is monosubstituted, as exemplified by isopropylidene (3-trimethylsilylcyclopentadienyl-9-fluorenyl) zirconium dichloride and diphenylmethylidene (3-trimethylsilyl cyclopentadienyl-9-fluorenyl) zirconium dichloride.


The production of syndiotactic/atactic block polyolefins is known from EP-A-0818475. In these known block polypropylenes there are alternating blocks of long syndiotactic and short atactic sequences. A generically defined metallocene compound is disclosed as a catalyst component in the production of these block polyolefins. The metallocene compound requires a heteroatom ligand coordinated to the metal of the metallocene, as exemplified by 2,7-bis-tert-butyl-fluorenyl-9-dimethylsilyl-tert-butyl-amido titanium dichloride.

In EP-A-0423101 and EP-A-0742227 a metallocene compound is described which has a lack of bi-lateral symmetry, one example of which is isopropylidene (3-methyl cyclopentadienyl-1-fluorenyl)zirconium dichloride. This compound was used in the production of hemiisotactic polypropylene. The structure of hemiisotactic polymers may be represented in a Fischer projection as follows:

WO 99/67309 PCT/EP99/04248



The monomeric unit of the polymer is of the following structure:



wherein Rs is a hydrocarbyl group or nonhydrocarbyl group.

The structure of the polymer is characterised by  $R_s$  groups attached to every other asymmetric carbon atom being on the same side of the principal polymer chain as represented in a Fischer projection and  $R_s$  groups attached to the remaining asymetric carbon atoms being either on the same side or the opposite side of the principal polymer chain. Since only every other one conforms to the isotactic structure, it is "hemi". The material is a noncrystalline polymer.

#### SUMMARY OF THE INVENTION

The present applicants have surprisingly found that short sequence syndiotactic/isotactic block polypropylenes can be prepared which have high clarity and elastomeric properties using an -aryl- substituted metallocene compound as a catalyst component.

The present invention provides a  $C_1$  symmetric metallocene compound of general formula  $R''(CpR_n)(Cp'R'_m)$   $MQ_p$  for use as a catalyst component in the production of short sequence syndiotactic/isotactic block polyolefins, wherein Cp is a substituted cyclopentadienyl; each R is independently aryl or hydrocarbyl having 1 to 20 carbon atoms, at least position 3 of Cp is substituted with aryl, at least one other position of Cp is substituted with a non-bulky substituted, and n is an integer in the range from 2 to 4; Cp' is substituted or unsubstituted

fluorenyl; each R' is independently hydrocarbyl having 1 to 20 carbon atoms and m is O or an integer in the range from 1 to 8; R" is a structural bridge to impart stereorigidity between Cp and Cp'; M is a metal from Group IIIB, IVB, VB or VIB; Q is a hydrocarbyl radical having 1 to 20 carbon atoms or a halogen; and p is the valence of M minus 2.

The polyolefin is preferably polypropylene. By short sequence syndiotactic/isotatic block polypropylene is meant a polypropylene that comprises alternating blocks of syndiotactic and isotactic sequence. Preferably, the average sequence length of each sequence is in the range 5 to 20, more preferably 5 to 10, most preferably around 6. The relative frequency of each sequence is typically in the range 1:3 to 3:1.

Preferably the isotactic and syndiotactic sequences have approximately the same length and frequency.

In the metallocene compound, the non-bulky substituent is preferably a linear hydrocarbyl having 1 to 20 carbon atoms, isobutyl or aryl. The non-bulky substituent should not interfere with the bridge and could be situated at position 2 and/or position 5, preferably at position 5. Cp is preferably substituted at position 3 of the ring with Ph.

The metal, M, is preferably Ti, Zr or Hf and Q is preferably a halogen, usually Cl. Typically R" is alkylidene having 1 to 20 carbon atoms, a dialkyl germanium or silicon or siloxane, alkyl phosphine or amine, preferably a hydrocarbyl radical having at least one carbon atom to form the bridge. More preferably R" is isopropylidene.

In a further aspect there is provided a catalyst system for use in preparing short sequence syndiotactic/isotactic block-polyolefins, which comprises (a) a metallocene compound as defined above; and (b) a cocatalyst capable of activating the metallocene compound. Typically, the cocatalyst comprises an

aluminium- or boron-containing cocatalyst.

Suitable aluminium-containing cocatalysts comprise an alumoxane, an alkyl aluminium and/or a Lewis acid.

The alumoxanes usable in the process of the present invention are well known and preferably comprise oligomeric linear and/or cyclic alkyl alumoxanes represented by the formula:

for oligomeric, linear alumoxanes and

for oligomeric, cyclic alumoxane,

wherein n is 1-40, preferably 10-20, m is 3-40, preferably 3-20 and R is a  $C_1$ - $C_8$  alkyl group and preferably methyl. Generally, in the preparation of alumoxanes from, for example, aluminium trimethyl and water, a mixture of linear and cyclic compounds is obtained.

Suitable boron-containing cocatalysts may comprise a triphenylcarbenium boronate such as tetrakis-pentafluorophenyl-borato-triphenylcarbenium as described in EP-A-0427696, or those of the general formula [L'-H] + [B Ar<sub>1</sub> Ar<sub>2</sub> X<sub>3</sub> X<sub>4</sub>] - as described in EP-A-0277004 (page 6, line 30 to page 7, line 7).

The catalyst system may be employed in a solution polymerisation process, which is homogeneous, or a slurry process, which is heterogeneous. In a solution process, typical solvents include hydrocarbons with 4 to 7 carbon atoms such as heptane, toluene

# WO 99/67309 PCT/EP99/04248

or cyclohexane. In a slurry process it is necessary to immobilise the catalyst system on an inert support, particularly a porous solid support such as talc, inorganic oxides and resinous support materials such as polyolefin. Preferably, the support material is an inorganic oxide in its finely divided form.

Suitable inorganic oxide materials which are desirably employed in accordance with this invention include Group 2a, 3a, 4a or 4b metal oxides such as silica, alumina and mixtures thereof. Other inorganic oxides that may be employed either alone or in combination with the silica, or alumina are magnesia, titania, zirconia, and the like. Other suitable support materials, however, can be employed, for example, finely divided functionalized polyolefins such as finely divided polyethylene.

Preferably, the support is a silica having a surface area comprised between 200 and 700  $\rm{m}^2/\rm{g}$  and a pore volume comprised between 0.5 and 4  $\rm{ml/g}$ .

The amount of alumoxane and metallocenes usefully employed in the preparation of the solid support catalyst can vary over a wide range. Preferably the aluminium to transition metal mole ratio is in the range between 1:1 and 100:1, preferably in the range 5:1 and 50:1.

The order of addition of the metallocenes and alumoxane to the support material can vary. In accordance with a preferred embodiment of the present invention alumoxane dissolved in a suitable inert hydrocarbon solvent is added to the support material slurried in the same or other suitable hydrocarbon liquid and thereafter a mixture of the metallocene catalyst component is added to the slurry.

Preferred solvents include mineral oils and the various hydrocarbons which are liquid at reaction temperature and which do not react with the individual ingredients. Illustrative

- 7 -

examples of the useful solvents include the alkanes such as pentane, iso-pentane, hexane, heptane, octane and nonane; cycloalkanes such as cyclopentane and cyclohexane, and aromatics such as benzene, toluene, ethylbenzene and diethylbenzene.

Preferably the support material is slurried in toluene and the metallocene and alumoxane are dissolved in toluene prior to addition to the support material.

In a further aspect the present invention provides a process for preparing a short sequence syndiotactic/isotactic block polyolefin, which comprises contacting the catalyst system with at least one olefin in a reaction zone under polymerisation conditions.

In a further aspect there is provided a polypropylene comprising at least 10 alternating blocks of syndiotactic sequence and isotactic sequence, wherein the relative frequency of the sequences in the polypropylene is in the range 1:3 to 3:1, as determined by the ratio of mmmm pentads to rrrr pentads in 13C NMR spectrosopy.

The invention will now be described in further detail, by way of example only, with reference to the following Examples and the accompanying drawings, in which:

FIGURE 1 shows in outline a reaction scheme for the production of isopropylidene(3-phenylcyclopentadienyl-9-fluorenyl)zirconium dichloride.

#### DETAILED DESCRIPTION OF THE INVENTION

#### Example 1

Synthesis of isopropylidene(3-methyl-5-phenylcyclopentadienyl-9-fluorenyl)zirconium dichloride

The synthesis is shown in outline in Figure 1. In a 500ml flask

equipped with a magnetic stirrer and a nitrogen inlet, 14.5 grams (87 mmole) of fluorene is dissolved in 140 ml of tetrahydrofuran At 0°C an equimolar amount of methyllithium (MeLi) in ether is added dropwise and the resulting red reaction mixture is stirred for 2h at ambient temperature. At 0°C an equimolar amount of 6,6-dimethyl-3-phenylcyclopentadienylfulvene in THF is added dropwise. The reaction mixture was stirred overnight at ambient temperature and hydrolysed with an aqueous, saturated solution of ammonium chloride in water. Subsequently the organic phase was separated with ether and dried over MgSO4. evaporation of the solvents yielded an offwhite solid (70% yield 5.44g (15 mmole) of the ligand after recrystallization). prepared above was dissolved in 100 milliliters of THF and treated with two equimolar quantities of MeLi in diethyl ether under nitrogen at 0°C. The red reaction mixture was stirred at ambient temperature overnight. After evaporation of THF a red powder was obtained that was washed with pentane. The powder was suspended in 200 milliliters of pentane and reacted with an equimolar amount of zirconnium tetrachloride. A crude product was obtained which was dissolved in methylene chloride and filtered to separate the lithium chloride by-product. methylene chloride is evaporated and the resulting solid washed with toluene until purely red (47% yield). The structure and composition were determined by 1H NMR.

#### Example 2

#### Polymerisation Procedure and Results

Propylene was polymerized using 1.8mg milligrams of isopropylidene(3-phenylcyclopentadienyl-9-fluorenyl) zirconium dichloride produced by the method above. One liter of liquid propylene was introduced into a Buechi reactor at room temperature. The catalyst was placed in three milliliters of 11% MAO in toluene to form a solution which was added to the reactor at 40°C and the temperature then increased to 60°C. The polymerization reaction was allowed to run for 60 minutes during which time the reactor was maintained at 60°C. The reaction was

- 9 -

terminated by venting the reactor of monomer. The catalyst activity in kilograms of polypropylene per grams of catalyst per hour was calculated. The molecular weight, molecular weight distribution, glass transition temperature and <sup>13</sup> C NMR analysis of the polymer were determined.

A polypropylene was obtained at an hourly production rate of  $60 \, \text{kg/g}$  catalyst which had a number average molecular weight (Mn) at 58528 Da, a weight average molecular weight (Mw) of 136212 Da, a D value (Mw/Mn) of 2.3 and a glass transition temperature of  $-3\,^{\circ}\text{C}$ .

Table 1 shows the results of microtacticity analysis from 13C NMR data in which the % of mmmm pentads is close to the % of rrrr pentads confirming the production of short sequence syndiotactic/isotactic polypropylene.

The length of stereoblocks can be estimated by the following formulae [Xu et al., Macromolecules, Vol.30, No.9, 1997, p.2539]:

The average sequence length of racemic units in long racemic sequences can be estimated as l(r) = 2[rrrr]/[mrrr]+3

Similarly, the average sequence length of meso units in long meso sequences can be estimated as l(m) = 2[mmmm]/[mmmr]+3

Applying these formulae to the data in Table 1 for the polymer from Example 2 this calculates to an average sequence length of racemic units of 6 and an average sequence length of meso units of likewise 6.

## Table 1

#### PENTADS

Sequence	%
mmmm	19,82
mmmx	13,00
rmmr	6,00
mmrr	23,76
rmrr+mrmm	2,34
mrmr	1,02
rrrr	15,24
mrrr	11,30
mrrm	7,52

## TRIADS

Sequence	8
mm	38,82
mr	27,12
rr	34,06

## DYADS

Sequence	*
m	52,38
r	47,62

#### CLAIMS:

- 1. A  $C_1$  symmetric metallocene compound of general formula  $R''(CpR_n)$   $(Cp'R'_m)$   $MQ_p$  for use as a catalyst component in the production of short sequence syndiotactic/isotactic block polyolefins, wherein Cp is a substituted cyclopentadienyl; each R is independently aryl or hydrocarbyl having 1 to 20 carbon atoms, at least position 3 of Cp is substituted with aryl, at least one other position of Cp is substituted with a non-bulky substituent, and n is an integer in the range from 2 to 4; Cp' is substituted or unsubstituted fluorenyl; each R' is independently hydrocarbyl having 1 to 20 carbon atoms and m is 0 or an integer in the range from 1 to 8; R'' is a structural bridge to impart stereorigidity between Cp and Cp'; M is a metal from Group IIIB, IVB, VB or VIB; Q is a hydrocarbyl radical having 1 to 20 carbon atoms or a halogen; and p is the valence of M minus 2.
- 2. A metallocene compound according to claim 1, wherein the non-bulky substituent is a linear hydrocarbyl having 1 to 20 carbon atoms, isobutyl or aryl.
- 3. A metallocene compound according to claim 1 or claim 2, wherein the non-bulky substituent is at position 5 of Cp.
- 4. A metallocene compound according to any one of claims 1 to 3, wherein Cp is substituted at position 3 with Ph.
- 5. A metallocene compound according to any one of the preceding claims, wherein M is Ti, Zr or Hf.
- 6. A metallocene compound according to any one of the preceding claims, wherein Q is Cl.
- 7. A metallocene compound according to any one of the preceding claims, wherein R" is alkylidene having 1 to 20 carbon atoms, a dialkyl germanium or silicon or siloxane, alkyl phosphine or amine.


- 12 -

- 8. A metallocene compound according to claim 7, wherein R'' is a hydrocarbyl radical having at least one carbon atom to form the bridge.
- 9. A metallocene compound according to claim 8, wherein R'' is isopropylidene.
- 10. A metallocene compound according to claim 1, which is isopropylidene(3-methyl-5-phenylcyclopentadienyl-9-fluorenyl) zirconium dichloride.
- 11. Use of a metallocene compound according to any one of the preceding claims as a catalyst component in the production of a short sequence syndiotactic/isotactic block polyolefin.
- 12. A catalyst system for use in preparing short sequence syndiotactic/isotactic block polyolefins, which comprises (a) a metallocene compound according to any one of claims 1 to 10; and (b) a cocatalyst capable of activating the metallocene compound.
- 13. A catalyst system according to claim 12, wherein the cocatalyst comprises an aluminium- or boron-containing cocatalyst.
- 14. A process for preparing a short sequence syndiotactic/isotactic block polyolefin, which comprises contacting a catalyst system according to claim 12 or claim 13 with at least one olefin in a reaction zone under polymerisation conditions.
- 15. A process according to claim 14, wherein the olefin is propylene.
- 16. A process according to claim 14 or claim 15, wherein the polyolefin comprises alternating blocks of syndiotactic and isotactic sequence having an average sequence length in the range 5 to 20.

WO 99/67309 PCT/EP99/04248

- 13 -

- 17. A process according to claim 16, wherein the relative frequency of each block is in the range 1:3 to 3:1, as determined by the ratio of mmmm pentads to rrrr pentads in 13C NMR spectrosocopy.
- 18. A polypropylene comprising at least 10 alternating blocks of syndiotactic sequence and isotactic sequence, wherein the relative frequency of the sequences in the polypropylene is in the range 1:3 to 3:1, as determined by the ratio of mmmm pentads to rrrr pentads in 13C NMR spectrosopy.
- 19. A polypropylene according to claim 18, wherein the relative frequency of the sequences is approximately 1:1.
- 20. A polypropylene according to claim 18 or claim 19, wherein the syndiotactic and isotactic sequences each have an average sequence length in the range 5 to 20.
- 21. A polypropylene according to claim 20, wherein the average sequence length is in the range 5 to 10.

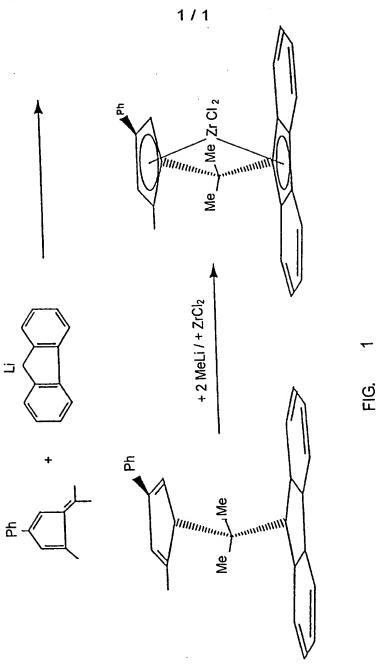

## INTERNATIONAL SEARCH REPORT

int ational Application No PCT/EP 99/04248

A. CLASSI IPC 6	FICATION OF SUBJECT MATTER C08F297/00 C08F297/06 C08F2	297/08 C08F10/00	C07F17/00
According to	o International Patent Classification (IPC) or to both national cla	assification and IPC	
	SEARCHED		
Minimum do IPC 6	ocumentation searched (classification system followed by class COSF CO7F CO8L	sification symbols)	
Documental	tion searched other than minimum documentation to the extent	that such documents are included in the	fields searched
Electronic d	ata base consulted during the international search (name of d	ata base and, where practical, search teri	ms used)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with Indication, where appropriate, of	the relevant passages	Relevant to claim No.
X	EP 0 747 406 A (FINA TECHNOLOG 11 December 1996 (1996-12-11) cited in the application	GY)	1-9, 11-21
Y	* page 3, line 20 ; page 3, line page 4, line 37 - page 5, line page 6, line 31 -page 7, line	e 13 *	10
Y	EP 0 399 347 A (HOECHST AG) 28 November 1990 (1990-11-28) * page 3, line 1 - page 9, line 1-2; example 2 *	ne 10 ;	10
Y	EP 0 742 227 A (FINA TECHNOLOG 13 November 1996 (1996-11-13) cited in the application * page 5, line 9-13 * page 4, line 17-26	GY)	1-21
	~	-/	
X Furt	1 her documents are listed in the continuation of box C.	X Patent family members a	re listed in annex.
' Special ca	ategories of cited documents:	"T" later document published after	the international filing date
"A" docum consid	ent defining the general state of the lart which is not dered to be of particular relevance	or priority date and not in con cited to understand the princip invention	flict with the application but
filing o		"X" document of particular relevant cannot be considered novel of	r cannot be considered to
which citatio	ent which may throw doubts on priority claim(s) or is cited to establish the publication date of another in or other special reason (as specified) ent referring to an oral disclosure, use, exhibition or	involve an inventive step whe "Y" document of particular relevan	n the document is taken alone ce; the claimed invention to an inventive step when the
other "P" docum	means ent published prior to the international filing date but han the priority date claimed	ments, such combination beir in the art.	ng obvious to a person skilled
	actual completion of the international search	"&" document member of the same	· · · · · · · · · · · · · · · · · · ·
3	30 September 1999	06/10/1999	
Name and	mailing address of the ISA  European Patent Office, P.B. 5818 Patentlaan 2  NL - 2280 HV Rijswijk	Authorized officer	
	Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Hammond, A	

2

## INTERNATIONAL SEARCH REPORT

Int ational Application No PCI/EP 99/04248

ategory *	ation) DOCUMENTS CONSIDERED TO BE RELEVANT  Citation of document, with indication where appropriate, of the relevant passages	Ta	Relevant to claim No.
- 3-17	and the second s	[	того части старти МО.
	EP 0 818 475 A (FINA RESEARCH) 14 January 1998 (1998-01-14) cited in the application * page 3, line 15 * page 3, line 1-24	·	1-21
	-		
	·		
		į	
		,	
-			
		1	

## INTERNATIONAL SEARCH REPORT

.nformation on patent family members

inte \*ional Application No PCI/EP 99/04248

	atent document d in search report		Publication date		Patent family member(s)	Publication date
EP	0747406	Α	11-12-1996	CA	2178411 A	08-12-1996
				DE	69600747 D	12-11-1998
	•		•	DE	69600747 T	08-04-1999
	•			ES	2123316 T	01-01-1999
				JP	9136930 A	27-05-1997
ΕP	0399347	Α	28-11-1990	DE	3916553 A	22-11-1990
				AU	624953 B	25-06-1992
				AU	5577290 A	10-01-1991
				CA	2017192 A	20-11-1990
				DE	59010446 D	19-09-1996
				ES	2093003 T	16-12-1996
				JP	3009913 A	17-01-1991
EP	0742227	Α	13-11-1996	US	5036034 A	30-07-1991
				CA	2027124 A	11-04-1991
				CN	1051735 A.B	29-05-1991
				CN	1100733 A	29-03-1995
				EP	0423101 A	17-04-1991
				JP	3193796 A	23-08-1991
EP	0818475	Α	14-01-1998	AU	3939897 A	09-02-1998
				CA	2260891 A	22-01-1998
				WO	9802469 A	22-01-1998
				EP	0910591 A	28-04-1999
				NO	990073 A	08-01-1999